

WH L4 Lever Hoist

The Hackett WH L4 lever hoist meets and exceeds the requirements of the following international standards:

British and European Standard BS EN13157:2004 + A1:2009

American Standard ASME B30.21-2014

Australian Standard AS1418.2-1997

South African Standard SANS 1636:2-2007

NORSOK R-002: 2017.


The design and specification of the William Hackett WH-L4 lever hoist includes:

- **WORKING LOAD LIMIT RANGE:** 800kg to 20 tonnes.
- **LIGHT LOAD CAPABILITY:** the WH L4 is tested and certified at 2% of the lever hoist rated capacity.
- **TWIN PAWL:** double safety; fitted as standard.
- **SAFETY LATCHES:** the WH L4 lever hoist top and bottom hooks are fitted with heavy duty cast steel latches. The latch and hook tips are integrated creating a strong and robust hook closure.
- **OVERLOAD INDICATOR MARKS:** the WH L4 lever hoist
- **TOP AND BOTTOM HOOKS** have, as part of the hook forging, overload indicator marks either side of the hook throat. By measuring the distance between the indicator marks, the hook can be quickly and easily checked to see if any stretch has occurred due to misuse or overloading.
- **HOOK HOUSING:** the WH L4 lever hoist top and bottom hook housings are secured with socket head cap screws/hex head bolts and nyloc locking nuts.
- **FLEETING/CROSS HAULING:** the WH L4 lever hoists are tested and certified for fleeting or cross hauling applications up to 45° from the vertical without deration.
- **LOAD CHAIN:** the WH L4 lever hoists are fitted with load chain that fully complies with international standard BS EN818-7 Grade T (8).
- **TEMPERATURE RANGE:** -20°C to +120°C
- **PROOF TESTED:** every hoist is proof tested to 1.5 times the Working Load Limit.
- **OPTIONAL EQUIPMENT:**
 - Overload Limiter
 - Top and bottom hook adaptors
 - Travelling End Stop
- **MANUFACTURED** in the UK




Specifications

Single Fall

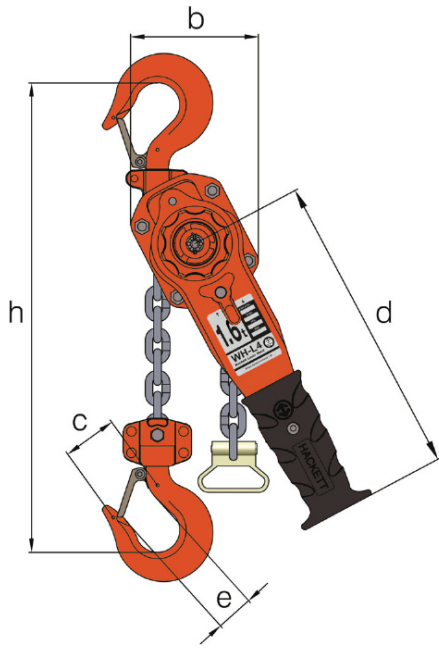

Multi Fall

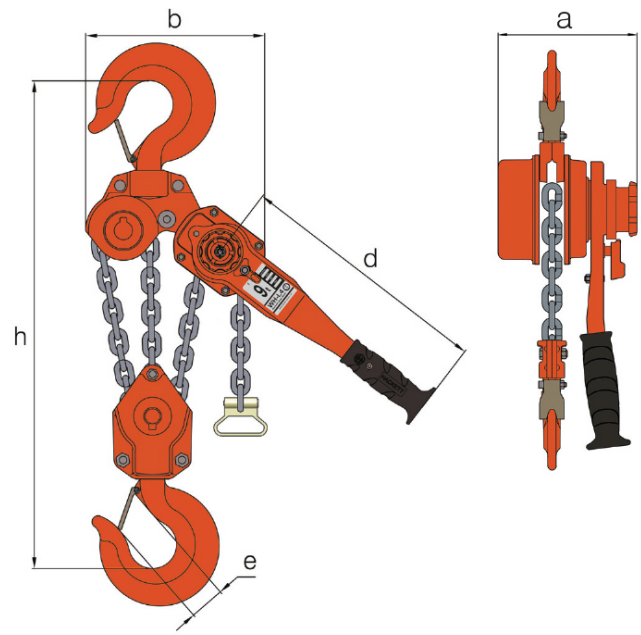

Part Code	WLL tonnes	No. of Falls	Load Chain mm	Standard Lift m	a mm	b mm	c mm	d mm	e mm	h mm	Mass kg	Extra Weight Per m kg
033.080	0.80	1	5.6 x 17	1.5	148.0	121	37.5	265	28.0	280	6.20	0.68
033.160	1.60	1	7.1 x 21	1.5	165.5	141	47.0	350	33.0	350	9.60	1.08
033.320	3.20	1	10.0 x 30	1.5	194.5	178	62.5	415	42.5	420	15.50	2.17
033.630	6.30	2	10.0 x 30	1.5	194.5	228	78.0	415	51.0	570	27.00	4.34
033.900	9.00	3	10.0 x 30	1.5	194.5	310	86.0	415	56.0	680	38.30	6.51
033/1500	15.00	6	10.0 x 30	1.5	194.5	420	-	415	80.0	1000	90.00	13.02



www.irishcranes.com • info@irishcranes.com

